

AUTOGLIDE

smart entry system



Fits to inside frame of door -70mm minimum width required (above).
Instant safety reverse (below).



Features:

Automated opening and unlatching system even when door is locked - totally secure

Child safety lock

Automatic courtesy light

Key fobs for all the family

Adaptor Kits for Henderson Doors and Garador Mk III 'C' type gear

New automatic safety reverse standards applied - 2005

SELECT
Software Limited

Software and Electronic Development

'Autoglide'

Cardale Doors Ltd



Enjoy the benefits of a Cardale Automated Garage Door Operator

Clever engineering design coming together with state of the art software & electronics offering you unrivalled control and operation

Security at its best holding your garage securely shut with millions of possible rolling transmitter codes to stop unauthorised access.

Open and close your garage door from the security and comfort of your car

0800 977 5974

CARDALE
GARAGE DOORS
Strong • Stylish • Secure

smart entry systems

Cardale Doors Limited
Brackley, Northamptonshire, NN13 7EA, England.
Tel: 01280 703022 Fax: 01280 702195
www.cardale.com

DPIN 4017 01.03.04

Automatic reverse if your door senses an obstacle or child

Smooth and quiet DC motor controlled output, giving low noise emission and low energy consumption, needing only 60 Watts of power.

With over 20,000 units now sold throughout the UK 'Autoglide' is proving to be one of the most reliable, safe and secure automated garage door operators on the market.

Select Software Limited, Manor Farm House, Home Farm Road, Ellingham, Bungay, Suffolk, England, NR35 2EL

Tel: +44 (0)1508 518112
Fax: +44 (0)1508 518113

sales@selectsoftware.net
www.selectsoftware.net

FEATURE	AUTOGLIDE
DOOR SUITABILITY	CD Professional Trackless Canopy gear* and CD45 retro fit
OPENING FORCE	400N
NORMAL RUNNING LOAD	60W (energy saving circuit) plus 120W light output
'STAND-BY' LOAD	7 Watts (energy saving circuit)
MOTOR	24V DC with thermal overload protection on transformer
CHIPSET	Smart Entry System auto-calibrating motherboard with LED diagnostics
DRIVE METHOD	Dymetrol belt
SAFETY DOOR REVERSE LIGHT	To fully open position 120W maximum, can be positioned away from the operator (bulb and cabling not included)
STANDARD BOOM	1 piece, sits on RHS of door frame
EXTENDED BOOM (OPTIONAL)	N/A
SUITABLE POSITION FOR MAINS SOCKET	Suitable height from floor on RHS of garage within 1000m of operator unit
DOOR SIZE SUITABILITY	Up to 2438 x 2134mm (8'0" x 7'0"). Min height 1930mm (6'4")
HEADROOM REQUIRED	None
SIDEROOM REQUIRED	70mm on RHS of door
MANUAL DISCONNECT	Yes
RADIO RECEIVER	Internal digital, auto-learning rolling code
RADIO TRANSMITTER	Digital 433 MHz two button mini handset, rolling code (1 billion variations)
TRANSMITTER RANGE	10 - 30 metres
BELL PUSH BUTTON	Yes
WARRANTY	2 years full parts and labour Cardale cover

*Adaptor kits available for Henderson doors built after 1987 and Garador Mk III 'C' type gear.


Adaptor kit

For converting Autoglide for use with Henderson doors built after 1987 and Garador Mk III 'C' type gear. Includes delatch kit.

Very safe and secure Trackless Canopy door operator featuring the smart entry system. Works without the need for a bow-arm converter and incorporates the door's latching system.



AUTOGLIDE smart entry system

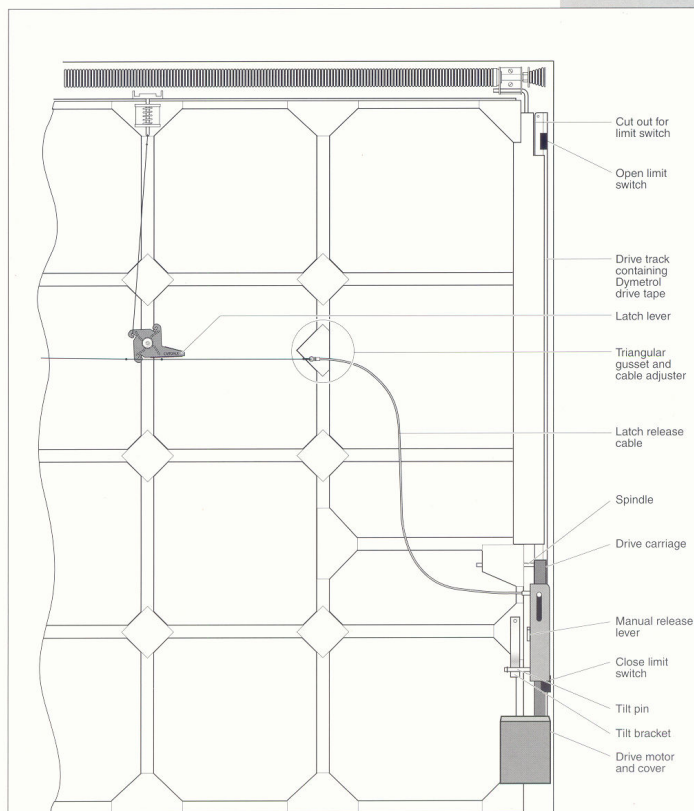

Mini transmitter (1 channel)

for use as an extra or replacement handset.

For more information regarding your local supplier - contact:

CARDALE
GARAGE DOORS
Strong • Stylish • Secure



smart entry systems

Cardale Doors Limited
Brackley, Northamptonshire, NN13 7EA, England.
Tel: 01280 703022 Fax: 01280 702195
www.cardale.com